

Booklet #

MECE 3321
Mechanics of Solids
Exam Booklet

Fundamental Equations of Mechanics of Materials

Axial Load

Normal Stress

$$\sigma = \frac{P}{A}$$

Displacement

$$\delta = \int_0^L \frac{P(x)dx}{A(x)E} = \sum \frac{PL}{AE}$$

$$\delta_T = \alpha \Delta T L$$

Torsion

Shear stress in circular shaft

$$\tau = \frac{Tc}{J}$$

where

$$J = \frac{\pi}{2} c^4 \quad \text{solid cross section}$$

$$J = \frac{\pi}{2} (c_o^4 - c_i^4) \quad \text{tubular cross section}$$

Power

$$P = T\omega$$

Angle of Twist

$$\phi = \int_0^L \frac{T(x)}{J(x)G} dx = \sum \frac{TL}{JG}$$

Bending

Normal Stress

$$\sigma = -\frac{My}{I}$$

Shear

Average direct shear stress

$$\tau_{avg} = \frac{V}{A}$$

Transverse shear stress

$$\tau = \frac{VQ}{It}$$

Material Property Relations

Poisson's ratio

$$\nu = -\frac{\epsilon_{lat}}{\epsilon_{long}}$$

Generalized Hooke's Law

$$\epsilon_x = \frac{1}{E} [\sigma_x - \nu(\sigma_y + \sigma_z)]$$

$$\epsilon_y = \frac{1}{E} [\sigma_y - \nu(\sigma_x + \sigma_z)]$$

$$\epsilon_z = \frac{1}{E} [\sigma_z - \nu(\sigma_x + \sigma_y)]$$

$$\gamma_{xy} = \frac{1}{G} \tau_{xy}, \quad \gamma_{yz} = \frac{1}{G} \tau_{yz}, \quad \gamma_{xz} = \frac{1}{G} \tau_{xz}$$

where

$$G = \frac{E}{2(1 + \nu)}$$

Stress in Thin-Walled Pressure Vessel

Cylinder

$$\sigma_1 = \frac{pr}{t} \quad \sigma_2 = \frac{pr}{2t}$$

Sphere

$$\sigma_1 = \sigma_2 = \frac{pr}{2t}$$

Relations between w, V, M

$$\frac{dV}{dx} = -w(x), \quad \frac{dM}{dx} = V$$

Elastic Curve

$$\frac{1}{\rho} = \frac{M}{EI}$$


$$EI \frac{d^4v}{dx^4} = -w(x)$$

$$EI \frac{d^3v}{dx^3} = V(x)$$

$$EI \frac{d^2v}{dx^2} = M(x)$$


Geometric Properties of Area Elements

Rectangular Area

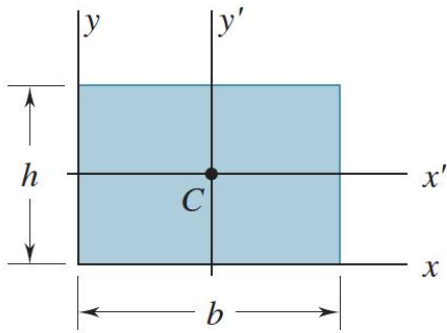


$$I_x = \frac{1}{12}bh^3 \quad I_y = \frac{1}{12}hb^3$$

Triangular Area

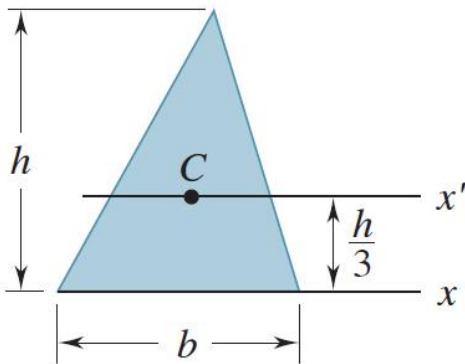


$$I_x = \frac{1}{36}bh^3$$

Semicircular Area

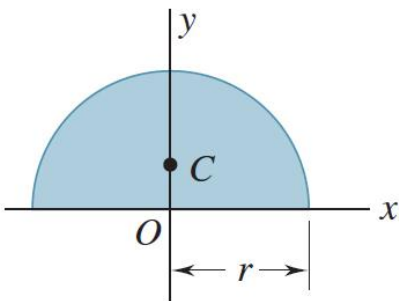

$$I_x = I_y = \frac{1}{8}\pi r^4 \quad C: \frac{4r}{3\pi}$$


Circular Area



$$I_x = I_y = \frac{\pi}{4}r^4 = \frac{\pi}{64}d^4$$


$$J = \frac{\pi}{2}r^4 = \frac{\pi}{32}d^4$$

Quarter-Circular Area

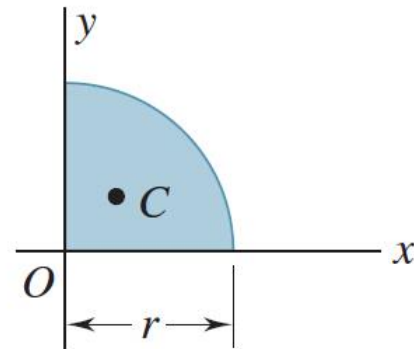

$$I_x = I_y = \frac{1}{16}\pi r^4 \quad C: \frac{4r}{3\pi}$$

Elliptical Area

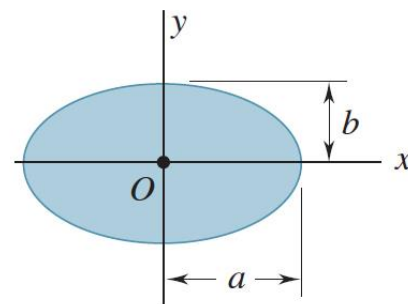

$$I_x = \frac{1}{4}\pi ab^3 \quad I_y = \frac{1}{4}\pi a^3b$$

Average Mechanical Properties of Typical Engineering Materials: US Customary Units

Materials		Specific Weight (lb/in ³)	Modulus of Elasticity (10 ³) ksi	Modulus of Rigidity (10 ³) ksi	Yield Strength (ksi)		Ultimate Strength (ksi)		Ductility, % Elongation	Coeff. of Thermal Expansion (10 ⁻⁶)/°F	
					Tens	Shear	Tens	Shear			
Metallic	Aluminum Alloys	2014-T6	0.101	10.9	3.9	58	33	66	40	13	12.8
		6061-T6	0.098	10.1	3.7	35	20	38	24	17	13.1
		7075-T6	0.101	10.4	4.0	73	-	83	48	11	13.1
	Cast Iron Alloys	Gray ASTM 20	0.260	10.0	3.9	-	-	26	-	0.6	6.7
		Gray ASTM A-48	0.260	10.0	4.1	-	-	25	35	0.5	6.7
		Malleable ASTM A-19	0.263	25.0	9.8	-	-	40	-	5	6.6
		Malleable ASTM A-47	0.264	24.0	9.3	33	-	50	48	10	6.7
	Copper Alloys	Red Brass (85% Cu,15% Zn) A	0.316	17.0	6.4	10	-	39	31	48	10.4
		Red Brass (85% Cu,15% Zn) CR	0.316	17.0	6.4	63	-	85	46	3	10.4
		Yellow Brass (65% Cu, 35% Zn) A	0.306	15.0	5.6	15	9	46	32	65	11.6
		Yellow Brass (65% Cu, 35% Zn) CR	0.306	15.0	5.6	60	36	74	43	8	11.6
		Bronze C86100	0.319	15.0	5.6	50	-	35	-	20	9.6
	Magnesium Alloy	AM 1004-T61	0.066	6.5	2.5	22	-	40	22	1	14.3
		AZ80 (Forging)	0.065	6.5	2.4	36	-	50	23	6	14
	Steel Alloys	Structural A36	0.284	29.0	11.2	36	21	58	-	21	6.5
		Structural A992	0.284	29.0	11.2	50	-	65	-	21	6.5
		Structural A913	0.284	29.0	11.2	65	-	80	-	17	6.5
		Structural A709 Q&T	0.284	29.0	11.2	100	-	110	-	18	6.5
		Stainless 302 CR	0.286	28.0	10.8	75	-	125	-	12	9.6
		Stainless 302 A	0.286	28.0	10.8	38	22	95	-	50	9.6
	Titanium Alloy	Ti-6Al-4V	0.161	16.5	6.4	120	-	130	-	10	5.3
Nonmetallic	Concrete	Low Strength	0.086	3.20	-	-	1.8	-	-	-	6.0
		Medium Strength	0.084	3.60	-	-	-	-	-	-	5.5
		High Strength	0.084	4.50	-	-	-	-	-	-	5.5
	Plastic	PVC	0.0520	0.45	-	6.5	-	6	-	40	75
		Polycarbonate	0.0433	0.35	-	9	-	9.5	-	110	68
		Polyester Elastomer	0.0433	0.03	-	-	-	6.5	-	500	-
	Structural Grade Wood	Douglas Fir	0.017	1.90	0.1	-	-	15	1.10	-	-
		White Oak	0.025	1.80	-	-	-	-	2	-	-
Glass	98% Silica	0.079	9.60	4.1	-	-	7	-	-	44	




A: Annealed, Q: Quenched, T: Tempered, CR: Cold Rolled

Average Mechanical Properties of Typical Engineering Materials: SI Units




Materials		Density 10 ³ kg/m ³	Modulus of Elasticity GPa	Modulus of Rigidity GPa	Yield Strength MPa		Ultimate Strength MPa		Ductility, % Elongation	Coeff. of Thermal Expansion (10 ⁻⁶)/°C	
					Tens	Shear	Tens	Shear			
Metallic	Aluminum Alloys	2014-T6	2.80	75.0	27.0	400	230	455	275	13	23
		6061-T6	2.71	70.0	26.0	240	140	260	165	17	23.6
		7075-T6	2.80	72.0	28.0	500	-	570	330	11	23.6
	Cast Iron Alloys	Gray ASTM 20	7.19	67.0	27.0	-	-	179	-	0.6	12
		Gray ASTM A-48	7.20	69.0	28.0	-	-	170	240	0.5	12.1
		Malleable ASTM A-19	7.28	172.0	68.0	-	-	276	-	5	12
		Malleable ASTM A-47	7.30	165.0	65.0	230	-	345	330	10	12.1
	Copper Alloys	Red Brass (85% Cu,15% Zn) A	8.74	120.0	44.0	70	-	270	210	48	18.7
		Red Brass (85% Cu,15% Zn) CR	8.74	120.0	44.0	435	-	585	320	3	18.7
		Yellow Brass (65% Cu, 35% Zn) A	8.47	105.0	39.0	100	60	320	220	65	20.9
		Yellow Brass (65% Cu, 35% Zn) CR	8.47	105.0	39.0	410	250	510	300	8	20.9
		Bronze C86100	8.83	103.0	38.0	345	-	655	-	20	17
	Magnesium Alloy	AM 1004-T61	1.83	44.7	18.0	152	-	276	152	1	26
		AZ80 (Forging)	1.80	45.0	16.0	250	-	345	160	6	25.2
	Steel Alloys	Structural A36	7.86	200.0	77.2	250	145	400	-	21	11.7
		Structural A992	7.86	200.0	77.2	345	-	450	-	21	11.7
		Structural A913	7.86	200.0	77.2	450	-	550	-	17	11.7
		Structural A709 Q&T	7.86	200.0	77.2	690	-	760	-	18	11.7
		Stainless 302 CR	7.92	190.0	75.0	520	-	860	-	12	17.3
		Stainless 302 A	7.92	190.0	75.0	260	150	655	-	50	17.3
Titanium Alloy	Ti-6Al-4V	4.73	115.0	44.0	830	-	900	-	10	9.5	
Nonmetallic	Concrete	Low Strength	2.38	22.1	-	-	12	-	-	-	11
		Medium Strength	2.32	25.0	-	-	-	-	-	-	9.9
		High Strength	2.32	30.0	-	-	-	-	-	-	9.9
	Plastic	PVC	1.44	3.1	-	45	-	40	-	40	135
		Polycarbonate	1.20	2.4	-	35	-	65	-	110	122
		Polyester Elastomer	1.20	0.2	-	-	-	45	-	500	-
	Structural Grade Wood	Douglas Fir	0.47	13.0	0.7	-	-	100	7.6	-	-
		White Oak	0.69	12.0	-	-	-	-	13.8	-	-
Glass	98% Silica	2.19	65	4.1	-	-	-	-	-	80	

A: Annealed, Q: Quenched, T: Tempered, CR: Cold Rolled




Beam Slopes and Deflections

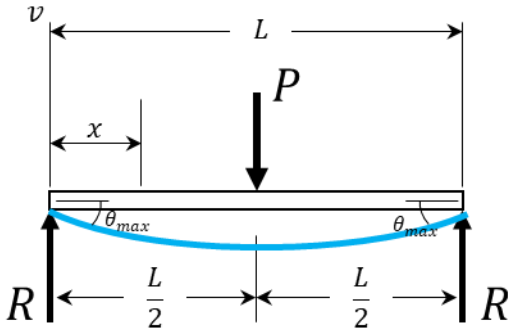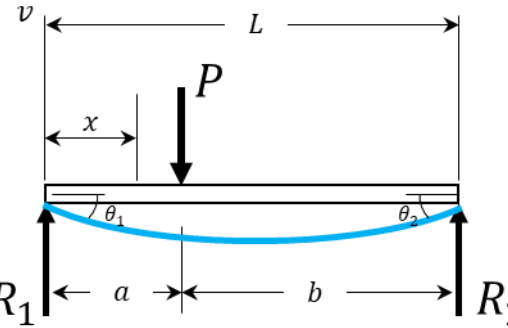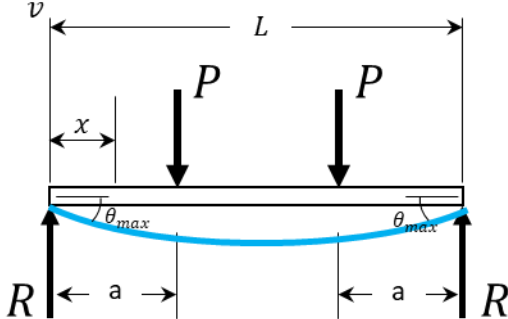Simply Supported Beam - Concentrated Force	Beam	Slope	Elastic Curve
		$\theta_{max} = \frac{PL^2}{16EI}$	<p>When $0 \leq x \leq \frac{L}{2}$:</p> $v = \frac{Px}{48EI}(3L^2 - 4x^2)$
		$\theta_1 = -\frac{Pab(L+b)}{6EIL}$ $\theta_2 = \frac{Pab(L+a)}{6EIL}$	<p>When $x \leq a$:</p> $v = \frac{Pbx}{6EIL}(L^2 - b^2 - x^2)$ <p>When $x \geq a$:</p> $v = \frac{Pa(L-x)}{6EIL}(2Lx - a^2 - x^2)$
		$\theta_{max} = \frac{Pa(L-a)}{2EI}$	<p>When $x \leq a$:</p> $v = \frac{Px}{6EI}(3aL - 3a^2 - x^2)$ <p>When $a \leq x \leq (L-a)$:</p> $v = \frac{Pa}{6EI}(3Lx - a^2 - 3x^2)$





Beam Slopes and Deflections

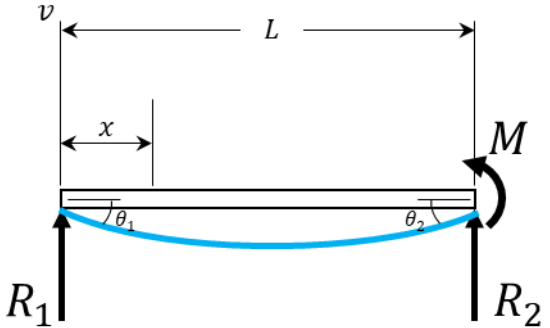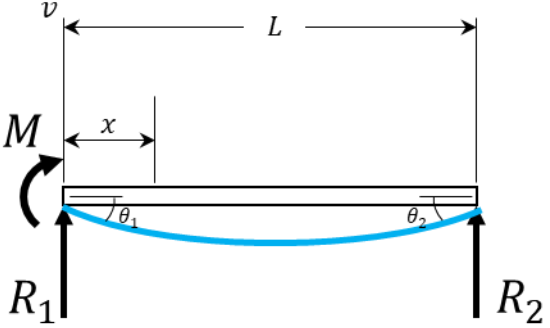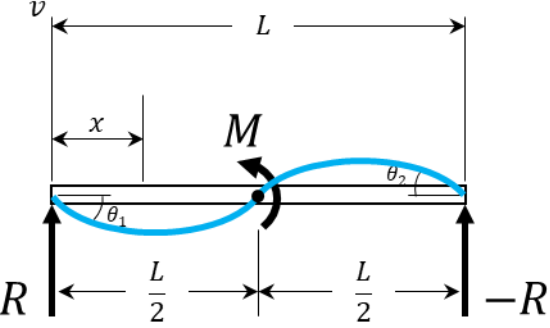	Beam	Slope	Elastic Curve
Simply Supported Beam - Concentrated Moment		$\theta_1 = -\frac{ML}{6EI}$ $\theta_2 = \frac{ML}{3EI}$	$v = \frac{Mx}{6EIL}(L^2 - x^2)$
		$\theta_1 = -\frac{ML}{3EI}$ $\theta_2 = \frac{ML}{6EI}$	$v = \frac{Mx}{6EIL}(2L^2 - 3Lx + x^2)$
		$\theta_1 = \frac{ML}{24EI}$ $\theta_2 = -\frac{ML}{24EI}$	<p>When $0 \leq x \leq \frac{L}{2}$:</p> $v = \frac{Mx}{24EIL}(L^2 - 4x^2)$




Beam Slopes and Deflections

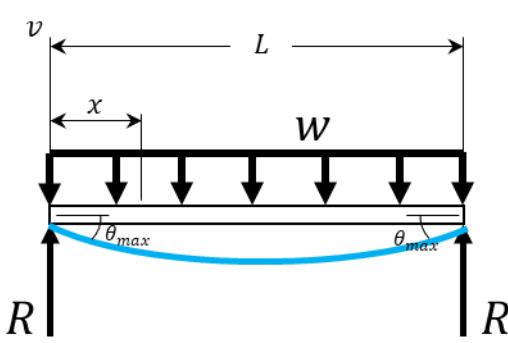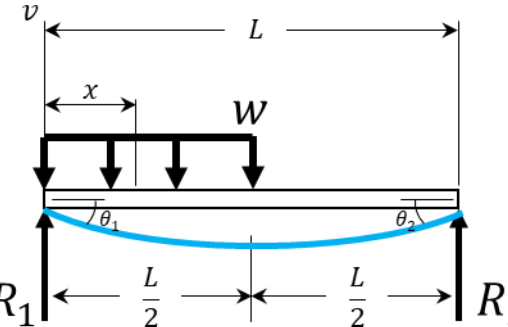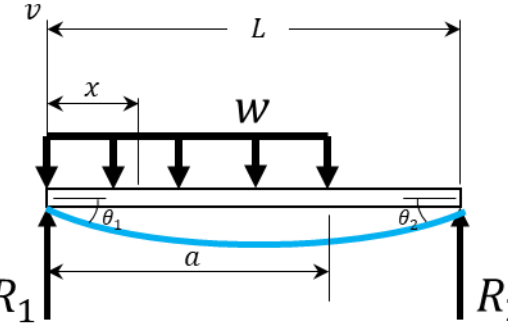	Beam	Slope	Elastic Curve
Simply Supported Beam - Distributed Load		$\theta_{max} = \frac{wL^3}{24EI}$	$v = \frac{wx}{24EI} (x^3 - 2Lx^2 + L^3)$
		$\theta_1 = -\frac{3wL^3}{128EI}$ $\theta_2 = \frac{7wL^3}{384EI}$	<p>When $0 \leq x \leq \frac{L}{2}$:</p> $v = \frac{wx}{384EI} (16x^3 - 24Lx^2 + 9L^3)$ <p>When $\frac{L}{2} \leq x \leq L$:</p> $v = \frac{wL}{384EI} (8x^3 - 24Lx^2 + 17L^2x - L^3)$
		$\theta_1 = -\frac{wa^2}{24EIL} (2L - a)^2$ $\theta_2 = \frac{wa^2}{24EIL} (2L^2 - a^2)$	<p>When $0 \leq x \leq a$:</p> $v = \frac{wx}{24EIL} (a^4 - 4a^3L + 4a^2L^2 + 2a^2x^2 - 4aLx^2 + Lx^3)$ <p>When $a \leq x \leq L$:</p> $v = \frac{wa^2}{24EIL} (-a^2L + 4L^2x + a^2x - 6Lx^2 + 2x^3)$



Beam Slopes and Deflections

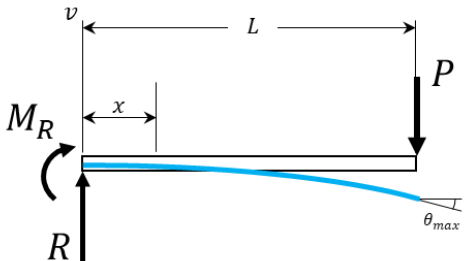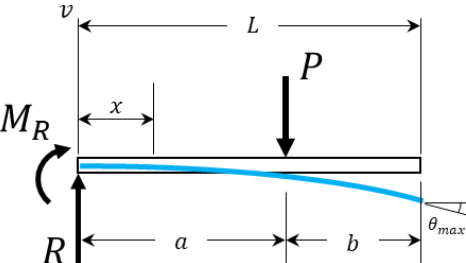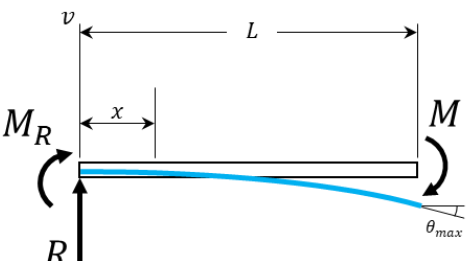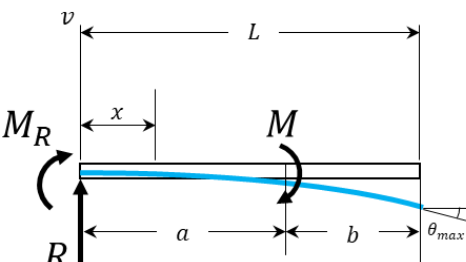Cantilevered Beam – Concentrated Force/Moment	Beam	Slope	Elastic Curve
		$\theta_{max} = \frac{PL^2}{2EI}$	$v = \frac{Px^2}{6EI}(3L - x)$
		$\theta_{max} = \frac{Pa^2}{2EI}$	<p>When $0 \leq x \leq a$:</p> $v = \frac{Px^2}{6EI}(3a - x)$ <p>When $a \leq x \leq L$:</p> $v = \frac{Pa^2}{6EI}(3x - a)$
		$\theta_{max} = \frac{ML}{EI}$	$v = \frac{Mx^2}{2EI}$
		$\theta_{max} = \frac{Ma}{EI}$	<p>When $0 \leq x \leq a$:</p> $v = \frac{Mx^2}{2EI}$ <p>When $a \leq x \leq L$:</p> $v = \frac{Ma}{2EI}(2x - a)$

Beam Slopes and Deflections

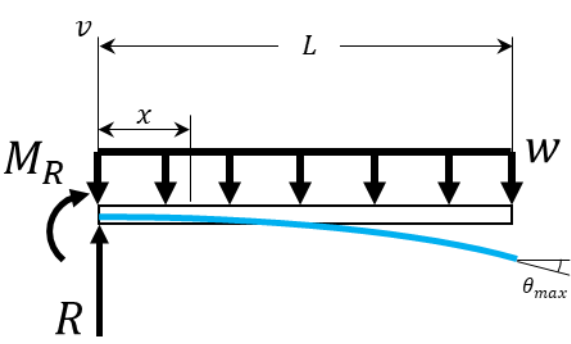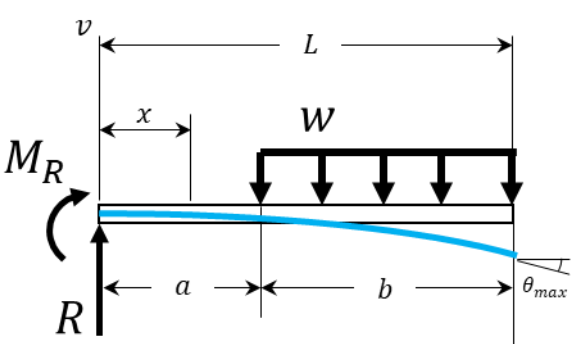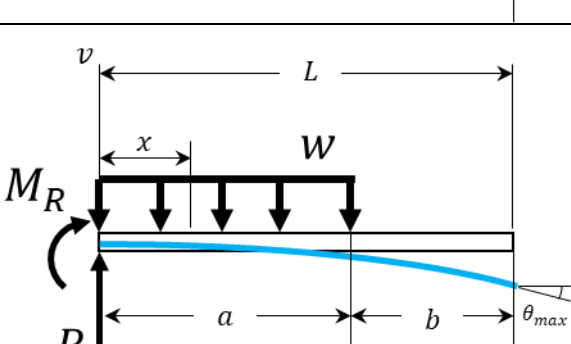
	Beam	Slope	Elastic Curve
Cantilevered Beam – Distributed Load		$\theta_{max} = \frac{wL^3}{6EI}$	$v = \frac{wx^2}{24EI} (6L^2 - 4Lx + x^2)$
		$\theta_{max} = \frac{w}{6EI} (L^3 - a^3)$	<p>When $0 \leq x \leq a$:</p> $v = \frac{wbx^2}{12EI} (3L + 3a - 2x)$ <p>When $a \leq x \leq L$:</p> $v = \frac{w}{24EI} (x^4 - 4Lx^3 + 6L^2x^2 - 4a^3x + a^4)$
		$\theta_{max} = \frac{wa^3}{6EI}$	<p>When $0 \leq x \leq a$:</p> $v = \frac{wx^2}{24EI} (6a^2 - 4ax + x^2)$ <p>When $a \leq x \leq L$:</p> $v = \frac{wa^3}{24EI} (4x - a)$

Beam Slopes and Deflections

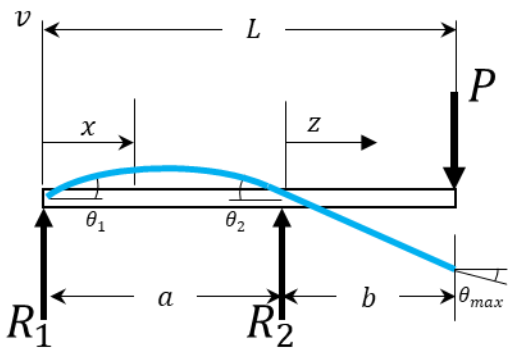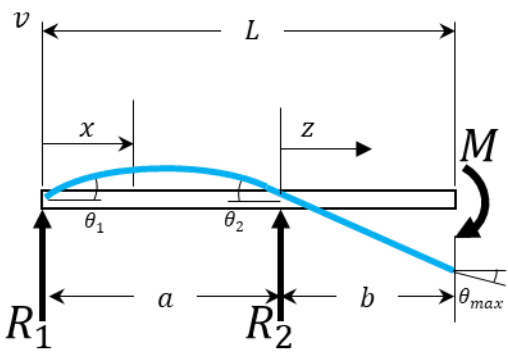	Beam	Slope	Elastic Curve
Overhanging Beam		$\theta_1 = \frac{Pab}{6EI}$ $\theta_2 = -\frac{Pab}{3EI}$ $\theta_{max} = \frac{Pb}{6EI}(2L + b)$	<p>When $0 \leq x \leq a$:</p> $v = \frac{Pbx}{6aEI}(a^2 - x^2)$ <p>When $0 \leq z \leq b$:</p> $v = \frac{Pz}{6EI}(2ab + 3bz - z^2)$
		$\theta_1 = \frac{Ma}{6EI}$ $\theta_2 = -\frac{Ma}{3EI}$ $\theta_{max} = \frac{M}{3EI}(a + 3b)$	<p>When $0 \leq x \leq a$:</p> $v = \frac{Mx}{6aEI}(a^2 - x^2)$ <p>When $0 \leq z \leq b$:</p> $v = \frac{M}{6EI}(2az + 3z^2)$

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(U.S. Customary Units)

W Shapes (Wide-Flange Shapes)


Designation [†]	Area <i>A</i> , in ²	Depth <i>d</i> , in.	Flange		Web Thick- ness <i>t_w</i> , in.	Axis X-X			Axis Y-Y		
			Width <i>b_f</i> , in.	Thick- ness <i>t_f</i> , in.		<i>I_x</i> , in ⁴	<i>S_x</i> , in ³	<i>r_x</i> , in.	<i>I_y</i> , in ⁴	<i>S_y</i> , in ³	<i>r_y</i> , in.
W36 × 302	88.8	37.3	16.7	1.68	0.945	21100	1130	15.4	1300	156	3.82
135	39.7	35.6	12.0	0.790	0.600	7800	439	14.0	225	37.7	2.38
W33 × 201	59.2	33.7	15.7	1.15	0.715	11600	686	14.0	749	95.2	3.56
118	34.7	32.9	11.5	0.740	0.550	5900	359	13.0	187	32.6	2.32
W30 × 173	51.0	30.4	15.0	1.07	0.655	8230	541	12.7	598	79.8	3.42
99	29.1	29.7	10.50	0.670	0.520	3990	269	11.7	128	24.5	2.10
W27 × 146	43.1	27.4	14.0	0.975	0.605	5660	414	11.5	443	63.5	3.20
84	24.8	26.70	10.0	0.640	0.460	2850	213	10.7	106	21.2	2.07
W24 × 104	30.6	24.1	12.8	0.750	0.500	3100	258	10.1	259	40.7	2.91
68	20.1	23.7	8.97	0.585	0.415	1830	154	9.55	70.4	15.7	1.87
W21 × 101	29.8	21.4	12.3	0.800	0.500	2420	227	9.02	248	40.3	2.89
62	18.3	21.0	8.24	0.615	0.400	1330	127	8.54	57.5	14.0	1.77
44	13.0	20.7	6.50	0.450	0.350	843	81.6	8.06	20.7	6.37	1.26
W18 × 106	31.1	18.7	11.2	0.940	0.590	1910	204	7.84	220	39.4	2.66
76	22.3	18.2	11.0	0.680	0.425	1330	146	7.73	152	27.6	2.61
50	14.7	18.0	7.50	0.570	0.355	800	88.9	7.38	40.1	10.7	1.65
35	10.3	17.7	6.00	0.425	0.300	510	57.6	7.04	15.3	5.12	1.22
W16 × 77	22.6	16.5	10.3	0.760	0.455	1110	134	7.00	138	26.9	2.47
57	16.8	16.4	7.12	0.715	0.430	758	92.2	6.72	43.1	12.1	1.60
40	11.8	16.0	7.00	0.505	0.305	518	64.7	6.63	28.9	8.25	1.57
31	9.13	15.9	5.53	0.440	0.275	375	47.2	6.41	12.4	4.49	1.17
26	7.68	15.7	5.50	0.345	0.250	301	38.4	6.26	9.59	3.49	1.12
W14 × 370	109	17.9	16.5	2.66	1.66	5440	607	7.07	1990	241	4.27
145	42.7	14.8	15.5	1.09	0.680	1710	232	6.33	677	87.3	3.98
82	24.0	14.3	10.1	0.855	0.510	881	123	6.05	148	29.3	2.48
68	20.0	14.0	10.0	0.720	0.415	722	103	6.01	121	24.2	2.46
53	15.6	13.9	8.06	0.660	0.370	541	77.8	5.89	57.7	14.3	1.92
43	12.6	13.7	8.00	0.530	0.305	428	62.6	5.82	45.2	11.3	1.89
38	11.2	14.1	6.77	0.515	0.310	385	54.6	5.87	26.7	7.88	1.55
30	8.85	13.8	6.73	0.385	0.270	291	42.0	5.73	19.6	5.82	1.49
26	7.69	13.9	5.03	0.420	0.255	245	35.3	5.65	8.91	3.55	1.08
22	6.49	13.7	5.00	0.335	0.230	199	29.0	5.54	7.00	2.80	1.04

[†]A wide-flange shape is designated by the letter W followed by the nominal depth in inches and the weight in pounds per foot.

(continued)

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(U.S. Customary Units)

W Shapes

(Wide-Flange Shapes)


Designation [†]	Area A, in ²	Depth d, in.	Flange		Web Thick- ness t _w , in.	Axis X-X			Axis Y-Y		
			Width b _f , in.	Thick- ness t _f , in.		I _x , in ⁴	S _x , in ³	r _x , in.	I _y , in ⁴	S _y , in ³	r _y , in.
W12 × 96	28.2	12.7	12.2	0.900	0.550	833	131	5.44	270	44.4	3.09
72	21.1	12.3	12.0	0.670	0.430	597	97.4	5.31	195	32.4	3.04
50	14.6	12.2	8.08	0.640	0.370	391	64.2	5.18	56.3	13.9	1.96
40	11.7	11.9	8.01	0.515	0.295	307	51.5	5.13	44.1	11.0	1.94
35	10.3	12.5	6.56	0.520	0.300	285	45.6	5.25	24.5	7.47	1.54
30	8.79	12.3	6.52	0.440	0.260	238	38.6	5.21	20.3	6.24	1.52
26	7.65	12.2	6.49	0.380	0.230	204	33.4	5.17	17.3	5.34	1.51
22	6.48	12.3	4.03	0.425	0.260	156	25.4	4.91	4.66	2.31	0.848
16	4.71	12.0	3.99	0.265	0.220	103	17.1	4.67	2.82	1.41	0.773
W10 × 112	32.9	11.4	10.4	1.25	0.755	716	126	4.66	236	45.3	2.68
68	20.0	10.4	10.1	0.770	0.470	394	75.7	4.44	134	26.4	2.59
54	15.8	10.1	10.0	0.615	0.370	303	60.0	4.37	103	20.6	2.56
45	13.3	10.1	8.02	0.620	0.350	248	49.1	4.32	53.4	13.3	2.01
39	11.5	9.92	7.99	0.530	0.315	209	42.1	4.27	45.0	11.3	1.98
33	9.71	9.73	7.96	0.435	0.290	171	35.0	4.19	36.6	9.20	1.94
30	8.84	10.5	5.81	0.510	0.300	170	32.4	4.38	16.7	5.75	1.37
22	6.49	10.2	5.75	0.360	0.240	118	23.2	4.27	11.4	3.97	1.33
19	5.62	10.2	4.02	0.395	0.250	96.3	18.8	4.14	4.29	2.14	0.874
15	4.41	10.0	4.00	0.270	0.230	68.9	13.8	3.95	2.89	1.45	0.810
W8 × 58	17.1	8.75	8.22	0.810	0.510	228	52.0	3.65	75.1	18.3	2.10
48	14.1	8.50	8.11	0.685	0.400	184	43.2	3.61	60.9	15.0	2.08
40	11.7	8.25	8.07	0.560	0.360	146	35.5	3.53	49.1	12.2	2.04
35	10.3	8.12	8.02	0.495	0.310	127	31.2	3.51	42.6	10.6	2.03
31	9.12	8.00	8.00	0.435	0.285	110	27.5	3.47	37.1	9.27	2.02
28	8.24	8.06	6.54	0.465	0.285	98.0	24.3	3.45	21.7	6.63	1.62
24	7.08	7.93	6.50	0.400	0.245	82.7	20.9	3.42	18.3	5.63	1.61
21	6.16	8.28	5.27	0.400	0.250	75.3	18.2	3.49	9.77	3.71	1.26
18	5.26	8.14	5.25	0.330	0.230	61.9	15.2	3.43	7.97	3.04	1.23
15	4.44	8.11	4.01	0.315	0.245	48.0	11.8	3.29	3.41	1.70	0.876
13	3.84	7.99	4.00	0.255	0.230	39.6	9.91	3.21	2.73	1.37	0.843
W6 × 25	7.34	6.38	6.08	0.455	0.320	53.4	16.7	2.70	17.1	5.61	1.52
20	5.87	6.20	6.02	0.365	0.260	41.4	13.4	2.66	13.3	4.41	1.50
16	4.74	6.28	4.03	0.405	0.260	32.1	10.2	2.60	4.43	2.20	0.967
12	3.55	6.03	4.00	0.280	0.230	22.1	7.31	2.49	2.99	1.50	0.918
9	2.68	5.90	3.94	0.215	0.170	16.4	5.56	2.47	2.20	1.11	0.905
W5 × 19	5.56	5.15	5.03	0.430	0.270	26.3	10.2	2.17	9.13	3.63	1.28
16 4.71	5.01	5.00	0.360	0.240	21.4	8.55	2.13	7.51	3.00	1.26	
W4 × 13	3.83	4.16	4.06	0.345	0.280	11.3	5.46	1.72	3.86	1.90	1.00

[†]A wide-flange shape is designated by the letter W followed by the nominal depth in inches and the weight in pounds per foot.

(continued)

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(U.S. Customary Units)

S Shapes (American Standard Shapes)


Designation [†]	Area A, in ²	Depth d, in.	Flange		Web Thick- ness t _w , in.	Axis X-X			Axis Y-Y		
			Width b _f , in.	Thick- ness t _f , in.		I _x , in ⁴	S _x , in ³	r _x , in.	I _y , in ⁴	S _y , in ³	r _y , in.
S24 × 121	35.5	24.5	8.05	1.09	0.800	3160	258	9.43	83.0	20.6	1.53
106	31.1	24.5	7.87	1.09	0.620	2940	240	9.71	76.8	19.5	1.57
100	29.3	24.0	7.25	0.870	0.745	2380	199	9.01	47.4	13.1	1.27
90	26.5	24.0	7.13	0.870	0.625	2250	187	9.21	44.7	12.5	1.30
80	23.5	24.0	7.00	0.870	0.500	2100	175	9.47	42.0	12.0	1.34
S20 × 96	28.2	20.3	7.20	0.920	0.800	1670	165	7.71	49.9	13.9	1.33
86	25.3	20.3	7.06	0.920	0.660	1570	155	7.89	46.6	13.2	1.36
75	22.0	20.0	6.39	0.795	0.635	1280	128	7.62	29.5	9.25	1.16
66	19.4	20.0	6.26	0.795	0.505	1190	119	7.83	27.5	8.78	1.19
S18 × 70	20.5	18.0	6.25	0.691	0.711	923	103	6.70	24.0	7.69	1.08
54.7	16.0	18.0	6.00	0.691	0.461	801	89.0	7.07	20.7	6.91	1.14
S15 × 50	14.7	15.0	5.64	0.622	0.550	485	64.7	5.75	15.6	5.53	1.03
42.9	12.6	15.0	5.50	0.622	0.411	446	59.4	5.95	14.3	5.19	1.06
S12 × 50	14.6	12.0	5.48	0.659	0.687	303	50.6	4.55	15.6	5.69	1.03
40.8	11.9	12.0	5.25	0.659	0.462	270	45.1	4.76	13.5	5.13	1.06
35	10.2	12.0	5.08	0.544	0.428	228	38.1	4.72	9.84	3.88	0.980
31.8	9.31	12.0	5.00	0.544	0.350	217	36.2	4.83	9.33	3.73	1.00
S10 × 35	10.3	10.0	4.94	0.491	0.594	147	29.4	3.78	8.30	3.36	0.899
25.4	7.45	10.0	4.66	0.491	0.311	123	24.6	4.07	6.73	2.89	0.950
S8 × 23	6.76	8.00	4.17	0.425	0.441	64.7	16.2	3.09	4.27	2.05	0.795
18.4	5.40	8.00	4.00	0.425	0.271	57.5	14.4	3.26	3.69	1.84	0.827
S6 × 17.2	5.06	6.00	3.57	0.359	0.465	26.2	8.74	2.28	2.29	1.28	0.673
12.5	3.66	6.00	3.33	0.359	0.232	22.0	7.34	2.45	1.80	1.08	0.702
S5 × 10	2.93	5.00	3.00	0.326	0.214	12.3	4.90	2.05	1.19	0.795	0.638
S4 × 9.5	2.79	4.00	2.80	0.293	0.326	6.76	3.38	1.56	0.887	0.635	0.564
7.7	2.26	4.00	2.66	0.293	0.193	6.05	3.03	1.64	0.748	0.562	0.576
S3 × 7.5	2.20	3.00	2.51	0.260	0.349	2.91	1.94	1.15	0.578	0.461	0.513
5.7	1.66	3.00	2.33	0.260	0.170	2.50	1.67	1.23	0.447	0.383	0.518

[†]An American Standard Beam is designated by the letter S followed by the nominal depth in inches and the weight in pounds per foot.

(continued)

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(U.S. Customary Units)

C Shapes (American Standard Channels)


Designation [†]	Area A, in ²	Depth d, in.	Flange		Web Thick- ness t _w , in.	Axis X-X			Axis Y-Y			
			Width b _f , in.	Thick- ness t _f , in.		I _x , in ⁴	S _x , in ³	r _x , in.	I _y , in ⁴	S _y , in ³	r _y , in.	x, in.
C15 × 50	14.7	15.0	3.72	0.650	0.716	404	53.8	5.24	11.0	3.77	0.865	0.799
40	11.8	15.0	3.52	0.650	0.520	348	46.5	5.45	9.17	3.34	0.883	0.778
33.9	10.0	15.0	3.40	0.650	0.400	315	42.0	5.62	8.07	3.09	0.901	0.788
C12 × 30	8.81	12.0	3.17	0.501	0.510	162	27.0	4.29	5.12	2.05	0.762	0.674
25	7.34	12.0	3.05	0.501	0.387	144	24.0	4.43	4.45	1.87	0.779	0.674
20.7	6.08	12.0	2.94	0.501	0.282	129	21.5	4.61	3.86	1.72	0.797	0.698
C10 × 30	8.81	10.0	3.03	0.436	0.673	103	20.7	3.42	3.93	1.65	0.668	0.649
25	7.34	10.0	2.89	0.436	0.526	91.1	18.2	3.52	3.34	1.47	0.675	0.617
20	5.87	10.0	2.74	0.436	0.379	78.9	15.8	3.66	2.80	1.31	0.690	0.606
15.3	4.48	10.0	2.60	0.436	0.240	67.3	13.5	3.87	2.27	1.15	0.711	0.634
C9 × 20	5.87	9.00	2.65	0.413	0.448	60.9	13.5	3.22	2.41	1.17	0.640	0.583
15	4.41	9.00	2.49	0.413	0.285	51.0	11.3	3.40	1.91	1.01	0.659	0.586
13.4	3.94	9.00	2.43	0.413	0.233	47.8	10.6	3.49	1.75	0.954	0.666	0.601
C8 × 18.7	5.51	8.00	2.53	0.390	0.487	43.9	11.0	2.82	1.97	1.01	0.598	0.565
13.7	4.04	8.00	2.34	0.390	0.303	36.1	9.02	2.99	1.52	0.848	0.613	0.554
11.5	3.37	8.00	2.26	0.390	0.220	32.5	8.14	3.11	1.31	0.775	0.623	0.572
C7 × 12.2	3.60	7.00	2.19	0.366	0.314	24.2	6.92	2.60	1.16	0.696	0.568	0.525
9.8	2.87	7.00	2.09	0.366	0.210	21.2	6.07	2.72	0.957	0.617	0.578	0.541
C6 × 13	3.81	6.00	2.16	0.343	0.437	17.3	5.78	2.13	1.05	0.638	0.524	0.514
10.5	3.08	6.00	2.03	0.343	0.314	15.1	5.04	2.22	0.860	0.561	0.529	0.500
8.2	2.39	6.00	1.92	0.343	0.200	13.1	4.35	2.34	0.687	0.488	0.536	0.512
C5 × 9	2.64	5.00	1.89	0.320	0.325	8.89	3.56	1.83	0.624	0.444	0.486	0.478
6.7	1.97	5.00	1.75	0.320	0.190	7.48	2.99	1.95	0.470	0.372	0.489	0.484
C4 × 7.2	2.13	4.00	1.72	0.296	0.321	4.58	2.29	1.47	0.425	0.337	0.447	0.459
5.4	1.58	4.00	1.58	0.296	0.184	3.85	1.92	1.56	0.312	0.277	0.444	0.457
C3 × 6	1.76	3.00	1.60	0.273	0.356	2.07	1.38	1.08	0.300	0.263	0.413	0.455
5	1.47	3.00	1.50	0.273	0.258	1.85	1.23	1.12	0.241	0.228	0.405	0.439
4.1	1.20	3.00	1.41	0.273	0.170	1.65	1.10	1.17	0.191	0.196	0.398	0.437

[†]An American Standard Channel is designated by the letter C followed by the nominal depth in inches and the weight in pounds per foot.

(continued)

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(U.S. Customary Units)


Angles Equal Legs

Size and Thickness, in.	Weight per Foot, lb/ft	Area, in ²	Axis X-X and Axis Y-Y				Axis Z-Z
			<i>I</i> , in ⁴	<i>S</i> , in ³	<i>r</i> , in.	<i>x</i> or <i>y</i> , in.	<i>r_z</i> , in.
L8 × 8 × 1	51.0	15.0	89.1	15.8	2.43	2.36	1.56
	³ / ₄ 38.9	11.4	69.9	12.2	2.46	2.26	1.57
	¹ / ₂ 26.4	7.75	48.8	8.36	2.49	2.17	1.59
L6 × 6 × 1	37.4	11.0	35.4	8.55	1.79	1.86	1.17
	³ / ₄ 28.7	8.46	28.1	6.64	1.82	1.77	1.17
	⁵ / ₈ 24.2	7.13	24.1	5.64	1.84	1.72	1.17
	¹ / ₂ 19.6	5.77	19.9	4.59	1.86	1.67	1.18
	³ / ₈ 14.9	4.38	15.4	3.51	1.87	1.62	1.19
L5 × 5 × ³ / ₄	23.6	6.94	15.7	4.52	1.50	1.52	0.972
	⁵ / ₈ 20.0	5.86	13.6	3.85	1.52	1.47	0.975
	¹ / ₂ 16.2	4.75	11.3	3.15	1.53	1.42	0.980
	³ / ₈ 12.3	3.61	8.76	2.41	1.55	1.37	0.986
L4 × 4 × ³ / ₄	18.5	5.44	7.62	2.79	1.18	1.27	0.774
	⁵ / ₈ 15.7	4.61	6.62	2.38	1.20	1.22	0.774
	¹ / ₂ 12.8	3.75	5.52	1.96	1.21	1.18	0.776
	³ / ₈ 9.80	2.86	4.32	1.50	1.23	1.13	0.779
	¹ / ₄ 6.60	1.94	3.00	1.03	1.25	1.08	0.783
L3 ¹ / ₂ × 3 ¹ / ₂ × ¹ / ₂	11.1	3.25	3.63	1.48	1.05	1.05	0.679
	³ / ₈ 8.50	2.48	2.86	1.15	1.07	1.00	0.683
	¹ / ₄ 5.80	1.69	2.00	0.787	1.09	0.954	0.688
L3 × 3 × ¹ / ₂	9.40	2.75	2.20	1.06	0.895	0.929	0.580
	³ / ₈ 7.20	2.11	1.75	0.825	0.910	0.884	0.581
	¹ / ₄ 4.90	1.44	1.23	0.569	0.926	0.836	0.585
L2 ¹ / ₂ × 2 ¹ / ₂ × ¹ / ₂	7.70	2.25	1.22	0.716	0.735	0.803	0.481
	³ / ₈ 5.90	1.73	0.972	0.558	0.749	0.758	0.481
	¹ / ₄ 4.10	1.19	0.692	0.387	0.764	0.711	0.482
	³ / ₁₆ 3.07	0.900	0.535	0.295	0.771	0.687	0.482
L2 × 2 × ³ / ₈	4.70	1.36	0.476	0.348	0.591	0.632	0.386
	¹ / ₄ 3.19	0.938	0.346	0.244	0.605	0.586	0.387
	¹ / ₈ 1.65	0.484	0.189	0.129	0.620	0.534	0.391

(continued)

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(U.S. Customary Units)


Angles Unequal Legs

Size and Thickness, in.	Weight per Foot, lb/ft	Area, in ²	Axis X-X				Axis Y-Y				Axis Z-Z	
			I_x , in ⁴	S_x , in ³	r_x , in.	y , in.	I_y , in ⁴	S_y , in ³	r_y , in.	x , in.	r_z , in.	$\tan \alpha$
L8 × 6 × 1	44.2	13.0	80.9	15.1	2.49	2.65	38.8	8.92	1.72	1.65	1.28	0.542
¾	33.8	9.94	63.5	11.7	2.52	2.55	30.8	6.92	1.75	1.56	1.29	0.550
½	23.0	6.75	44.4	8.01	2.55	2.46	21.7	4.79	1.79	1.46	1.30	0.557
L6 × 4 × ¾	23.6	6.94	24.5	6.23	1.88	2.07	8.63	2.95	1.12	1.07	0.856	0.428
½	16.2	4.75	17.3	4.31	1.91	1.98	6.22	2.06	1.14	0.981	0.864	0.440
⅜	12.3	3.61	13.4	3.30	1.93	1.93	4.86	1.58	1.16	0.933	0.870	0.446
L5 × 3 × ½	12.8	3.75	9.43	2.89	1.58	1.74	2.55	1.13	0.824	0.746	0.642	0.357
⅜	9.80	2.86	7.35	2.22	1.60	1.69	2.01	0.874	0.838	0.698	0.646	0.364
¼	6.60	1.94	5.09	1.51	1.62	1.64	1.41	0.600	0.853	0.648	0.652	0.371
L4 × 3 × ½	11.1	3.25	5.02	1.87	1.24	1.32	2.40	1.10	0.858	0.822	0.633	0.542
⅜	8.50	2.48	3.94	1.44	1.26	1.27	1.89	0.851	0.873	0.775	0.636	0.551
¼	5.80	1.69	2.75	0.988	1.27	1.22	1.33	0.585	0.887	0.725	0.639	0.558
L3½ × 2½ × ½	9.40	2.75	3.24	1.41	1.08	1.20	1.36	0.756	0.701	0.701	0.532	0.485
⅜	7.20	2.11	2.56	1.09	1.10	1.15	1.09	0.589	0.716	0.655	0.535	0.495
¼	4.90	1.44	1.81	0.753	1.12	1.10	0.775	0.410	0.731	0.607	0.541	0.504
L3 × 2 × ½	7.70	2.25	1.92	1.00	0.922	1.08	0.667	0.470	0.543	0.580	0.425	0.413
⅜	5.90	1.73	1.54	0.779	0.937	1.03	0.539	0.368	0.555	0.535	0.426	0.426
¼	4.10	1.19	1.09	0.541	0.953	0.980	0.390	0.258	0.569	0.487	0.431	0.437
L2½ × 2 × ⅜	5.30	1.55	0.914	0.546	0.766	0.826	0.513	0.361	0.574	0.578	0.419	0.612
¼	3.62	1.06	0.656	0.381	0.782	0.779	0.372	0.253	0.589	0.532	0.423	0.624

(continued)

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(SI Units)


W Shapes (Wide-Flange Shapes)

Designation [†]	Area A, mm ²	Depth d, mm.	Flange		Web Thick- ness t _w mm	Axis X-X			Axis Y-Y		
			Width b _f mm	Thick- ness t _f mm		I _x 10 ⁶ mm ⁴	S _x 10 ³ mm ³	r _x mm	I _y 10 ⁶ mm ⁴	S _y 10 ³ mm ³	r _y mm
W920 × 449	57300	947	424	42.7	24.0	8780	18500	391	541	2560	97.0
201	25600	904	305	20.1	15.2	3250	7190	356	93.7	618	60.5
W840 × 299	38200	856	399	29.2	18.2	4830	11200	356	312	1560	90.4
176	22400	836	292	18.8	14.0	2460	5880	330	77.8	534	58.9
W760 × 257	32900	772	381	27.2	16.6	3430	8870	323	249	1310	86.9
147	18800	754	267	17.0	13.2	1660	4410	297	53.3	401	53.3
W690 × 217	27800	696	356	24.8	15.4	2360	6780	292	184	1040	81.3
125	16000	678	254	16.3	11.7	1190	3490	272	44.1	347	52.6
W610 × 155	19700	612	325	19.1	12.7	1290	4230	257	108	667	73.9
101	13000	602	228	14.9	10.5	762	2520	243	29.3	257	47.5
W530 × 150	19200	544	312	20.3	12.7	1010	3720	229	103	660	73.4
92	11800	533	209	15.6	10.2	554	2080	217	23.9	229	45.0
66	8390	526	165	11.4	8.89	351	1340	205	8.62	104	32.0
W460 × 158	20100	475	284	23.9	15.0	795	3340	199	91.6	646	67.6
113	14400	462	279	17.3	10.8	554	2390	196	63.3	452	66.3
74	9480	457	191	14.5	9.02	333	1460	187	16.7	175	41.9
52	6650	450	152	10.8	7.62	212	944	179	6.37	83.9	31.0
W410 × 114	14600	419	262	19.3	11.6	462	2200	178	57.4	441	62.7
85	10800	417	181	18.2	10.9	316	1510	171	17.9	198	40.6
60	7610	406	178	12.8	7.75	216	1060	168	12.0	135	39.9
46.1	5890	404	140	11.2	6.99	156	773	163	5.16	73.6	29.7
38.8	4950	399	140	8.76	6.35	125	629	159	3.99	57.2	28.4
W360 × 551	70300	455	419	67.6	42.2	2260	9950	180	828	3950	108
216	27500	376	394	27.7	17.3	712	3800	161	282	1430	101
122	15500	363	257	21.7	13.0	367	2020	154	61.6	480	63.0
101	12900	356	254	18.3	10.5	301	1690	153	50.4	397	62.5
79	10100	353	205	16.8	9.40	225	1270	150	24.0	234	48.8
64	8130	348	203	13.5	7.75	178	1030	148	18.8	185	48.0
57.8	7230	358	172	13.1	7.87	160	895	149	11.1	129	39.4
44	5710	351	171	9.78	6.86	121	688	146	8.16	95.4	37.8
39	4960	353	128	10.7	6.48	102	578	144	3.71	58.2	27.4
32.9	4190	348	127	8.51	5.84	82.8	475	141	2.91	45.9	26.4

[†]A wide-flange shape is designated by the letter W followed by the nominal depth in millimeters and the mass in kilograms per meter.

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(SI Units)


W Shapes (Wide-Flange Shapes)

Designation [†]	Area <i>A</i> , mm ²	Depth <i>d</i> , mm	Flange		Web Thick- ness <i>t_w</i> mm	Axis X-X			Axis Y-Y		
			Width <i>b_f</i> , mm	Thick- ness <i>t_f</i> , mm		<i>I_x</i> 10 ⁶ mm ⁴	<i>S_x</i> 10 ³ mm ³	<i>r_x</i> mm	<i>I_y</i> 10 ⁶ mm ⁴	<i>S_y</i> 10 ³ mm ³	<i>r_y</i> mm
W310 × 143	18200	323	310	22.9	14.0	347	2150	138	112	728	78.5
107	13600	312	305	17.0	10.9	248	1600	135	81.2	531	77.2
74	9420	310	205	16.3	9.40	163	1050	132	23.4	228	49.8
60	7550	302	203	13.1	7.49	128	844	130	18.4	180	49.3
52	6650	318	167	13.2	7.62	119	747	133	10.2	122	39.1
44.5	5670	312	166	11.2	6.60	99.1	633	132	8.45	102	38.6
38.7	4940	310	165	9.65	5.84	84.9	547	131	7.20	87.5	38.4
32.7	4180	312	102	10.8	6.60	64.9	416	125	1.94	37.9	21.5
23.8	3040	305	101	6.73	5.59	42.9	280	119	1.17	23.1	19.6
W250 × 167	21200	290	264	31.8	19.2	298	2060	118	98.2	742	68.1
101	12900	264	257	19.6	11.9	164	1240	113	55.8	433	65.8
80	10200	257	254	15.6	9.4	126	983	111	42.9	338	65.0
67	8580	257	204	15.7	8.89	103	805	110	22.2	218	51.1
58	7420	252	203	13.5	8.00	87.0	690	108	18.7	185	50.3
49.1	6260	247	202	11.0	7.37	71.2	574	106	15.2	151	49.3
44.8	5700	267	148	13.0	7.62	70.8	531	111	6.95	94.2	34.8
32.7	4190	259	146	9.14	6.10	49.1	380	108	4.75	65.1	33.8
28.4	3630	259	102	10.0	6.35	40.1	308	105	1.79	35.1	22.2
22.3	2850	254	102	6.86	5.84	28.7	226	100	1.20	23.8	20.6
W200 × 86	11000	222	209	20.6	13.0	94.9	852	92.7	31.3	300	53.3
71	9100	216	206	17.4	10.2	76.6	708	91.7	25.3	246	52.8
59	7550	210	205	14.2	9.14	60.8	582	89.7	20.4	200	51.8
52	6650	206	204	12.6	7.87	52.9	511	89.2	17.7	174	51.6
46.1	5880	203	203	11.0	7.24	45.8	451	88.1	15.4	152	51.3
41.7	5320	205	166	11.8	7.24	40.8	398	87.6	9.03	109	41.1
35.9	4570	201	165	10.2	6.22	34.4	342	86.9	7.62	92.3	40.9
31.3	3970	210	134	10.2	6.35	31.3	298	88.6	4.07	60.8	32.0
26.6	3390	207	133	8.38	5.84	25.8	249	87.1	3.32	49.8	31.2
22.5	2860	206	102	8.00	6.22	20.0	193	83.6	1.42	27.9	22.3
19.3	2480	203	102	6.48	5.84	16.5	162	81.5	1.14	22.5	21.4
W150 × 37.1	4740	162	154	11.6	8.13	22.2	274	68.6	7.12	91.9	38.6
29.8	3790	157	153	9.27	6.60	17.2	220	67.6	5.54	72.3	38.1
24	3060	160	102	10.3	6.60	13.4	167	66.0	1.84	36.1	24.6
18	2290	153	102	7.11	5.84	9.20	120	63.2	1.24	24.6	23.3
13.5	1730	150	100	5.46	4.32	6.83	91.1	62.7	0.916	18.2	23.0
W130 × 28.1	3590	131	128	10.9	6.86	10.9	167	55.1	3.80	59.5	32.5
23.8	3040	127	127	9.14	6.10	8.91	140	54.1	3.13	49.2	32.0
W100 × 19.3	2470	106	103	8.76	7.11	4.70	89.5	43.7	1.61	31.1	25.4

[†]A wide-flange shape is designated by the letter W followed by the nominal depth in millimeters and the mass in kilograms per meter.

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(SI Units)


S Shapes (American Standard Shapes)

Designation [†]	Area A, mm ²	Depth d, mm	Flange		Web Thick- ness t _w mm	Axis X-X			Axis Y-Y		
			Width b _f mm	Thick- ness t _f mm		I _x 10 ⁶ mm ⁴	S _x 10 ³ mm ³	r _x mm	I _y 10 ⁶ mm ⁴	S _y 10 ³ mm ³	r _y mm
S610 × 180	22900	622	204	27.7	20.3	1320	4230	240	34.5	338	38.9
158	20100	622	200	27.7	15.7	1220	3930	247	32.0	320	39.9
149	18900	610	184	22.1	18.9	991	3260	229	19.7	215	32.3
134	17100	610	181	22.1	15.9	937	3060	234	18.6	205	33.0
119	15200	610	178	22.1	12.7	874	2870	241	17.5	197	34.0
S510 × 143	18200	516	183	23.4	20.3	695	2700	196	20.8	228	33.8
128	16300	516	179	23.4	16.8	653	2540	200	19.4	216	34.5
112	14200	508	162	20.2	16.1	533	2100	194	12.3	152	29.5
98.2	12500	508	159	20.2	12.8	495	1950	199	11.4	144	30.2
S460 × 104	13200	457	159	17.6	18.1	384	1690	170	10.0	126	27.4
81.4	10300	457	152	17.6	11.7	333	1460	180	8.62	113	29.0
S380 × 74	9480	381	143	15.8	14.0	202	1060	146	6.49	90.6	26.2
64	8130	381	140	15.8	10.4	186	973	151	5.95	85.0	26.9
S310 × 74	9420	305	139	16.7	17.4	126	829	116	6.49	93.2	26.2
60.7	7680	305	133	16.7	11.7	112	739	121	5.62	84.1	26.9
52	6580	305	129	13.8	10.9	94.9	624	120	4.10	63.6	24.9
47.3	6010	305	127	13.8	8.89	90.3	593	123	3.88	61.1	25.4
S250 × 52	6650	254	125	12.5	15.1	61.2	482	96.0	3.45	55.1	22.8
37.8	4810	254	118	12.5	7.90	51.2	403	103	2.80	47.4	24.1
S200 × 34	4360	203	106	10.8	11.2	26.9	265	78.5	1.78	33.6	20.2
27.4	3480	203	102	10.8	6.88	23.9	236	82.8	1.54	30.2	21.0
S150 × 25.7	3260	152	90.7	9.12	11.8	10.9	143	57.9	0.953	21.0	17.1
18.6	2360	152	84.6	9.12	5.89	9.16	120	62.2	0.749	17.7	17.8
S130 × 15	1890	127	76.2	8.28	5.44	5.12	80.3	52.1	0.495	13.0	16.2
S100 × 14.1	1800	102	71.1	7.44	8.28	2.81	55.4	39.6	0.369	10.4	14.3
11.5	1460	102	67.6	7.44	4.90	2.52	49.7	41.7	0.311	9.21	14.6
S75 × 11.2	1420	76.2	63.8	6.60	8.86	1.21	31.8	29.2	0.241	7.55	13.0
8.5	1070	76.2	59.2	6.60	4.32	1.04	27.4	31.2	0.186	6.28	13.2

[†]An American Standard Beam is designated by the letter S followed by the nominal depth in millimeters and the mass in kilograms per meter.

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.



(SI Units)

C Shapes (American Standard Channels)

Designation [†]	Area A, mm^2	Depth d, mm	Flange		Web Thick- ness t_w, mm	Axis X-X			Axis Y-Y			
			Width b_f, mm	Thick- ness t_f, mm		I_x 10^6mm^4	S_x 10^3mm^3	r_x mm	I_y 10^6mm^4	S_y 10^3mm^3	r_y mm	x mm
C380 × 74	9480	381	94.5	16.5	18.2	168	882	133	4.58	61.8	22.0	20.3
60	7610	381	89.4	16.5	13.2	145	762	138	3.82	54.7	22.4	19.8
50.4	6450	381	86.4	16.5	10.2	131	688	143	3.36	50.6	22.9	20.0
C310 × 45	5680	305	80.5	12.7	13.0	67.4	442	109	2.13	33.6	19.4	17.1
37	4740	305	77.5	12.7	9.83	59.9	393	113	1.85	30.6	19.8	17.1
30.8	3920	305	74.7	12.7	7.16	53.7	352	117	1.61	28.2	20.2	17.7
C250 × 45	5680	254	77.0	11.1	17.1	42.9	339	86.9	1.64	27.0	17.0	16.5
37	4740	254	73.4	11.1	13.4	37.9	298	89.4	1.39	24.1	17.1	15.7
30	3790	254	69.6	11.1	9.63	32.8	259	93.0	1.17	21.5	17.5	15.4
22.8	2890	254	66.0	11.1	6.10	28.0	221	98.3	0.945	18.8	18.1	16.1
C230 × 30	3790	229	67.3	10.5	11.4	25.3	221	81.8	1.00	19.2	16.3	14.8
22	2850	229	63.2	10.5	7.24	21.2	185	86.4	0.795	16.6	16.7	14.9
19.9	2540	229	61.7	10.5	5.92	19.9	174	88.6	0.728	15.6	16.9	15.3
C200 × 27.9	3550	203	64.3	9.91	12.4	18.3	180	71.6	0.820	16.6	15.2	14.4
20.5	2610	203	59.4	9.91	7.70	15.0	148	75.9	0.633	13.9	15.6	14.1
17.1	2170	203	57.4	9.91	5.59	13.5	133	79.0	0.545	12.7	15.8	14.5
C180 × 18.2	2320	178	55.6	9.30	7.98	10.1	113	66.0	0.483	11.4	14.4	13.3
14.6	1850	178	53.1	9.30	5.33	8.82	100	69.1	0.398	10.1	14.7	13.7
C150 × 19.3	2460	152	54.9	8.71	11.1	7.20	94.7	54.1	0.437	10.5	13.3	13.1
15.6	1990	152	51.6	8.71	7.98	6.29	82.6	56.4	0.358	9.19	13.4	12.7
12.2	1540	152	48.8	8.71	5.08	5.45	71.3	59.4	0.286	8.00	13.6	13.0
C130 × 13	1700	127	48.0	8.13	8.26	3.70	58.3	46.5	0.260	7.28	12.3	12.1
10.4	1270	127	44.5	8.13	4.83	3.11	49.0	49.5	0.196	6.10	12.4	12.3
C100 × 10.8	1370	102	43.7	7.52	8.15	1.91	37.5	37.3	0.177	5.52	11.4	11.7
8	1020	102	40.1	7.52	4.67	1.60	31.5	39.6	0.130	4.54	11.3	11.6
C75 × 8.9	1140	76.2	40.6	6.93	9.04	0.862	22.6	27.4	0.125	4.31	10.5	11.6
7.4	948	76.2	38.1	6.93	6.55	0.770	20.2	28.4	0.100	3.74	10.3	11.2
6.1	774	76.2	35.8	6.93	4.32	0.687	18.0	29.7	0.0795	3.21	10.1	11.1


[†]An American Standard Channel is designated by the letter C followed by the nominal depth in millimeters and the mass in kilograms per meter.

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.

(SI Units)


Angles
Equal Legs



Axis X-X Size and Thickness, mm	Mass per Meter, kg/m Area, mm ²		Axis				Z-Z
			<i>I</i> 10 ⁶ mm ⁴	<i>S</i> 10 ³ mm ³	<i>r</i> mm	<i>x</i> or <i>y</i> mm	<i>r_z</i> mm
L203 × 203 × 25.4	75.9	9680	37.1	259	61.7	59.9	39.6
19	57.9	7350	29.1	200	62.5	57.4	39.9
12.7	39.3	5000	20.3	137	63.2	55.1	40.4
L152 × 152 × 25.4	55.7	7100	14.7	140	45.5	47.2	29.7
19	42.7	5460	11.7	109	46.2	45.0	29.7
15.9	36.0	4600	10.0	92.4	46.7	43.7	29.7
12.7	29.2	3720	8.28	75.2	47.2	42.4	30.0
9.5	22.2	2830	6.41	57.5	47.5	41.1	30.2
L127 × 127 × 19	35.1	4480	6.53	74.1	38.1	38.6	24.7
15.9	29.8	3780	5.66	63.1	38.6	37.3	24.8
12.7	24.1	3060	4.70	51.6	38.9	36.1	24.9
9.5	18.3	2330	3.65	39.5	39.4	34.8	25.0
L102 × 102 × 19	27.5	3510	3.17	45.7	30.0	32.3	19.7
15.9	23.4	2970	2.76	39.0	30.5	31.0	19.7
12.7	19.0	2420	2.30	32.1	30.7	30.0	19.7
9.5	14.6	1850	1.80	24.6	31.2	28.7	19.8
6.4	9.80	1250	1.25	16.9	31.8	27.4	19.9
L89 × 89 × 12.7	16.5	2100	1.51	24.3	26.7	26.7	17.2
9.5	12.6	1600	1.19	18.8	27.2	25.4	17.3
6.4	8.60	1090	0.832	12.9	27.7	24.2	17.5
L76 × 76 × 12.7	14.0	1770	0.916	17.4	22.7	23.6	14.7
9.5	10.7	1360	0.728	13.5	23.1	22.5	14.8
6.4	7.30	929	0.512	9.32	23.5	21.2	14.9
L64 × 64 × 12.7	11.4	1450	0.508	11.7	18.7	20.4	12.2
9.5	8.70	1120	0.405	9.14	19.0	19.3	12.2
6.4	6.10	768	0.288	6.34	19.4	18.1	12.2
4.8	4.60	581	0.223	4.83	19.6	17.4	12.2
L51 × 51 × 9.5	7.00	877	0.198	5.70	15.0	16.1	9.80
6.4	4.70	605	0.144	4.00	15.4	14.9	9.83
3.2	2.40	312	0.0787	2.11	15.7	13.6	9.93

Geometric Properties of Structural Shapes

Copyright © McGraw-Hill Education. All rights reserved. No reproduction or distribution without the prior written consent of McGraw-Hill Education.





(SI Units)

Angles Unequal Legs

Size and Thickness, mm	Mass per Meter kg/m	Area mm ²	Axis X-X				Axis Y-Y				Axis Z-Z	
			I_x 10 ⁶ mm ⁴	S_x 10 ³ mm ³	r_x mm	y mm	I_y 10 ⁶ mm ⁴	S_y 10 ³ mm ³	r_y mm	x mm	r_z mm	$\tan \alpha$
L203 × 152 × 25.4	65.5	8390	33.7	247	63.2	67.3	16.1	146	43.7	41.9	32.5	0.542
19	50.1	6410	26.4	192	64.0	64.8	12.8	113	44.5	39.6	32.8	0.550
12.7	34.1	4350	18.5	131	64.8	62.5	9.03	78.5	45.5	37.1	33.0	0.557
L152 × 102 × 19	35.0	4480	10.2	102	47.8	52.6	3.59	48.3	28.4	27.2	21.7	0.428
12.7	24.0	3060	7.20	70.6	48.5	50.3	2.59	33.8	29.0	24.9	21.9	0.440
9.5	18.2	2330	5.58	54.1	49.0	49.0	2.02	25.9	29.5	23.7	22.1	0.446
L127 × 76 × 12.7	19.0	2420	3.93	47.4	40.1	44.2	1.06	18.5	20.9	18.9	16.3	0.357
9.5	14.5	1850	3.06	36.4	40.6	42.9	0.837	14.3	21.3	17.7	16.4	0.364
6.4	9.80	1250	2.12	24.7	41.1	41.7	0.587	9.83	21.7	16.5	16.6	0.371
L102 × 76 × 12.7	16.4	2100	2.09	30.6	31.5	33.5	0.999	18.0	21.8	20.9	16.1	0.542
9.5	12.6	1600	1.64	23.6	32.0	32.3	0.787	13.9	22.2	19.7	16.2	0.551
6.4	8.60	1090	1.14	16.2	32.3	31.0	0.554	9.59	22.5	18.4	16.2	0.558
L89 × 64 × 12.7	13.9	1770	1.35	23.1	27.4	30.5	0.566	12.4	17.8	17.8	13.5	0.485
9.5	10.7	1360	1.07	17.9	27.9	29.2	0.454	9.65	18.2	16.6	13.6	0.495
6.4	7.30	929	0.753	12.3	28.4	27.9	0.323	6.72	18.6	15.4	13.7	0.504
L76 × 51 × 12.7	11.5	1450	0.799	16.4	23.4	27.4	0.278	7.70	13.8	14.7	10.8	0.413
9.5	8.80	1120	0.641	12.8	23.8	26.2	0.224	6.03	14.1	13.6	10.8	0.426
6.4	6.10	768	0.454	8.87	24.2	24.9	0.162	4.23	14.5	12.4	10.9	0.437
L64 × 51 × 9.5	7.90	1000	0.380	8.95	19.5	21.0	0.214	5.92	14.6	14.7	10.6	0.612
6.4	5.40	684	0.273	6.24	19.9	19.8	0.155	4.15	15.0	13.5	10.7	0.624


Stress Concentration Factors

Axial Loading

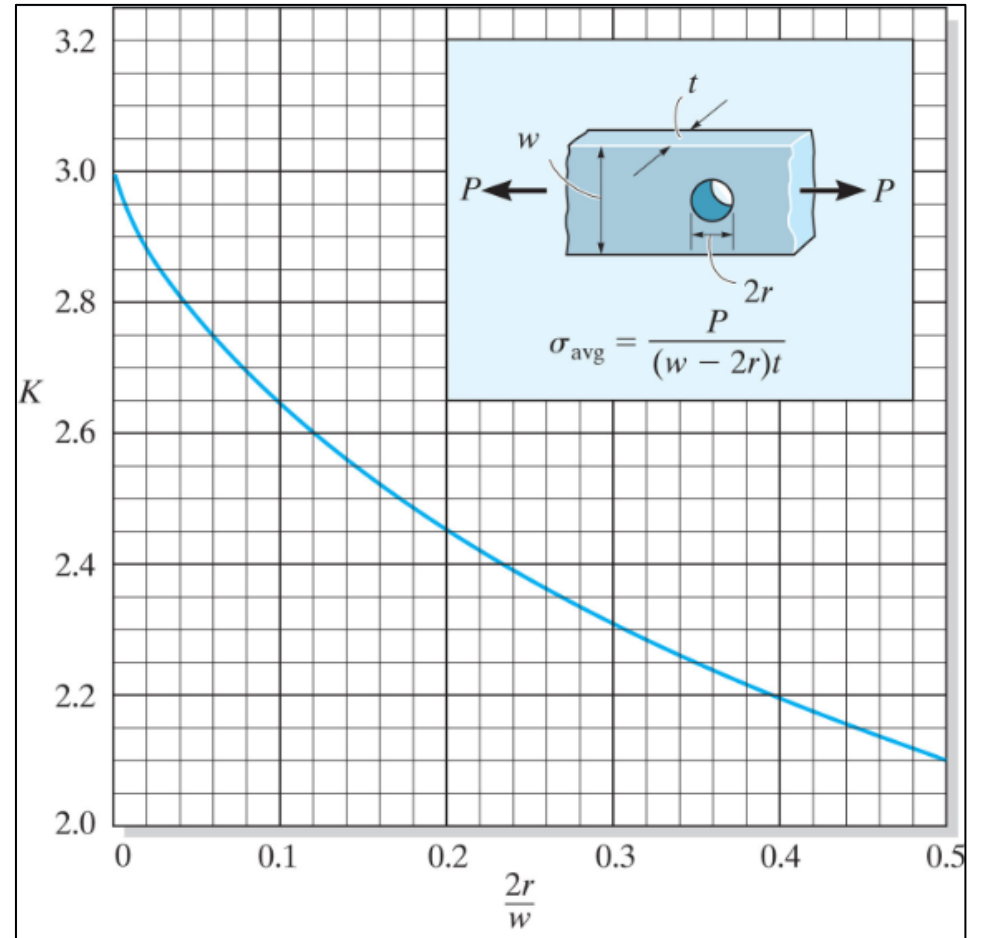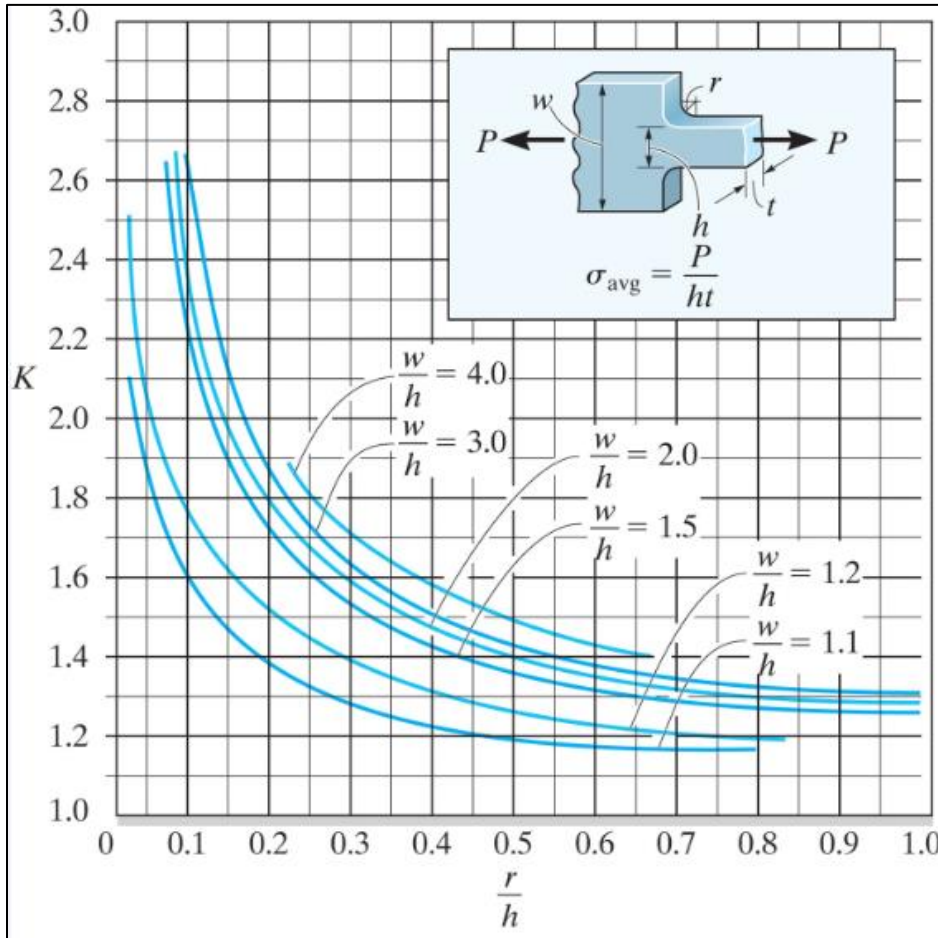

Stress Concentration Factors

Torsional Loading

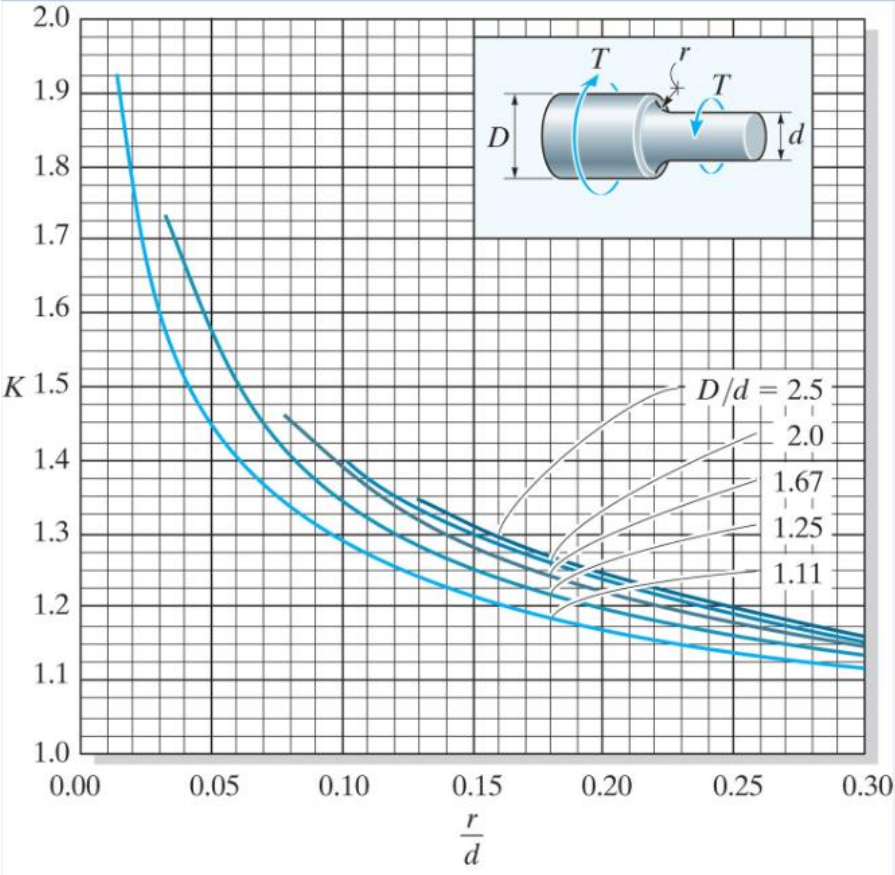

Stress Concentration Factors

Bending

